




MAC - S3 - 58

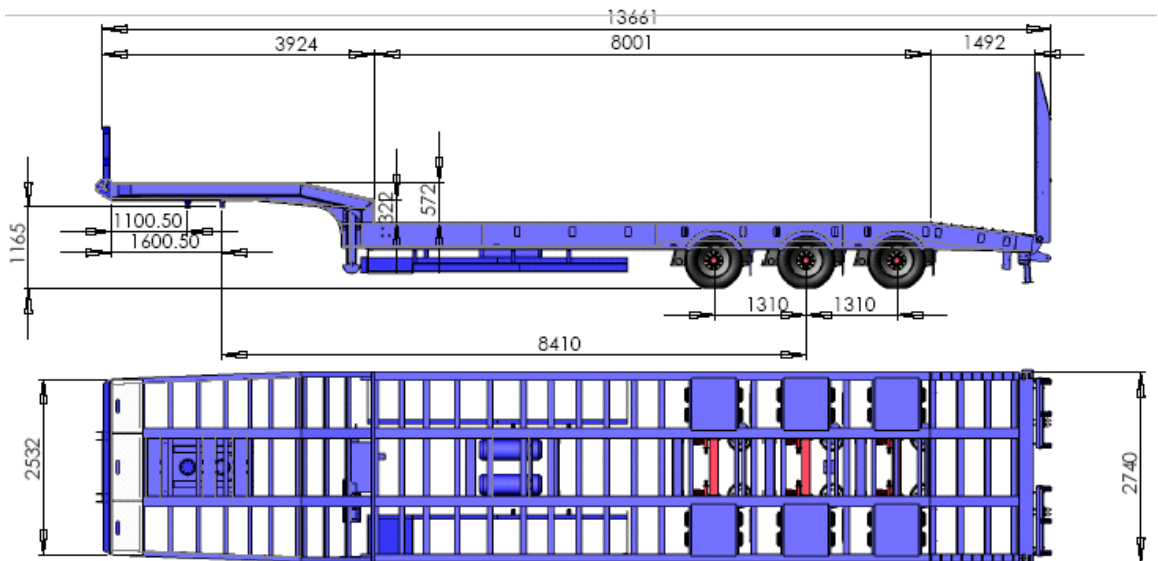

X DIMENSIONS

- Neck Length – 3920mm
- Bed Length – 8000mm
- Beaver tail Length – 1500mm
- Total length ex ramps – 13300mm
- Overall Length – 13 600mm
- Step height – 320mm at bed rising to total of 570mm
- Width – 2550mm
- Capacity per axle – 12500kg
- Capacity king pin – 24000kg
- Total capacity C & U – 44000kg
- Special Uses capacity up to 58000kg at 20km/h
- King pin position 1300/1600mm
- King pin to centre axle – 8410mm
- Axle spread – 1360mm

X CHASSIS FRAME

- Main beam manufactured from 350mmx150mm MSP fabricated I section with 20mm flanges
- Chassis supported by 160x80mm IPE floor bearers @500mm pitch.
- Neck main beam is manufactured by a 250x150mm MSP fabricated I section
- Neck side rave 200 x 75mm PFC
- Bed side rave 390x120mm MSP fabricated I section with 20mm flanges

X RAMPS

- 760mm wide 2430mm long hydraulic operated

X HEADBOARD

- Optional

X AXLE/ SUSPENSION

- 3no 12500kg Granning axles on air suspension approx. 240mm ride height
- Rear Lift Axle
- Auto Slack adjustors

X BRAKES

- EBS on centre axle with full load sensing

X WHEELS

- 235/75 x R 17.5 Tyres

X MUDGUARDS

- Side chime constructed with recessed wheel arches at all wheels complete with anti spray mud flaps

X OUTRIGGER

- 12no Pullout galvanized outriggers to beaver tail and bed

X LIGHTS

- Fitted to full C & U regulations

X TYING 9 GALVANISED D-**RINGS AND 18 ROPE HOOKS**

- Fitted for securing plant to customers specification.

X LANDING LEGS

- Dual gear landing legs

X STORAGE

- Offside crash rail is complete with 1no lockable plastic toolbox.

X FLOOR

- 28mm hardwood neck and 35mm hardwood bed
- Centre of bed in hardwood with an inspection hatch over the axle complete with hand holes.
- Steel over all the wheel arches

X PAINTING

- Shotblast metal prep, primer & paint in McCauley Red.

* NB Manufacture does not supply air & electric leads for the tractor unit.

OPTIONS**Brakes and Axles**

- SAF Axles
 - Axle load 11000kg
 - King pin load 24000kg
 - Total Capacity at 20km/h 57000kg

- BPW Axles
- ROR axles
- Front Lift Axle
- 9ft wide trailer and axles

Lights

- Pull Out Side Light
- Beckon Plate wired for beckon
- Beckon fitted
- Double Tail Lights

 Raise/Lower Valve**Ramps and headboard**

- Hydraulic Slide sideways In
- Hydraulic Slide sideways Out
- 1000mm wide 8ft MAC-C00150
- 1000mm Wide 9ft MAC-C00233
- Flip toe ramps
- Ramps to suit crusher/planner
- Steel underlay(ramps) crusher/planner
- Steel underlay(beaver) crusher/planner
- Aluminum ramps
- Solid 300mm static headboard
- 900mm high tractor headboard (galvanized)MAC-C00157
- 600mm high tractor headboard (galvanized)

- 300mm high tractor headboard (galvanized)MAC-C00177
- Demountable 300mm solid headboard

Storage

- 1 no extra plastic toolbox
- Demountable galvanized storage trays
- Closed timber trays (i.e. toolboxes)
- 300mm cribs around the neck(lift out)
- 300mm cribs around the neck(hinged)

Neck and floor

- Hydraulic automatic neck ramps (3no)
- Manual Lift out neck ramps (3no)
- Cheese wedge neck ramps
- Hydraulic sliding neck
- Tapered neck (9ft wide trailer only)

- Steel hatch over axle (each)
- Extra D-ring No: _____
- Recessed D-ring No: _____
- Rope Hook Extra No: _____
- Steel underlay both sides of bed

Tyres

- Spare wheel
- Spare wheel carrier
- Michelin/ Bridgestone
- 285/70 x R 19.5 Tyres

Other

- Twist lock (pair)
- 4ton Electric Winch (super winch)
- Extra Outriggers

Colour

-
-
-
-
-
- Additional Spec Sheet

FOR OFFICE USE ONLY:

Pin Size 50mm/57.5mm
Pin type VBG/Rockinger

Hitch height _____mm

Model No _____